



Rayonnage Mi-Lourd

DIMENSIONS DES HORIZONTALES ET DES DIAGONALES EN [mm]




PROFONDEUR	HORIZONTALE	DIAGONALE
400	360	905
500	460	946
600	560	996
800	760	1118
1000	960	1260
1200	1160	1417

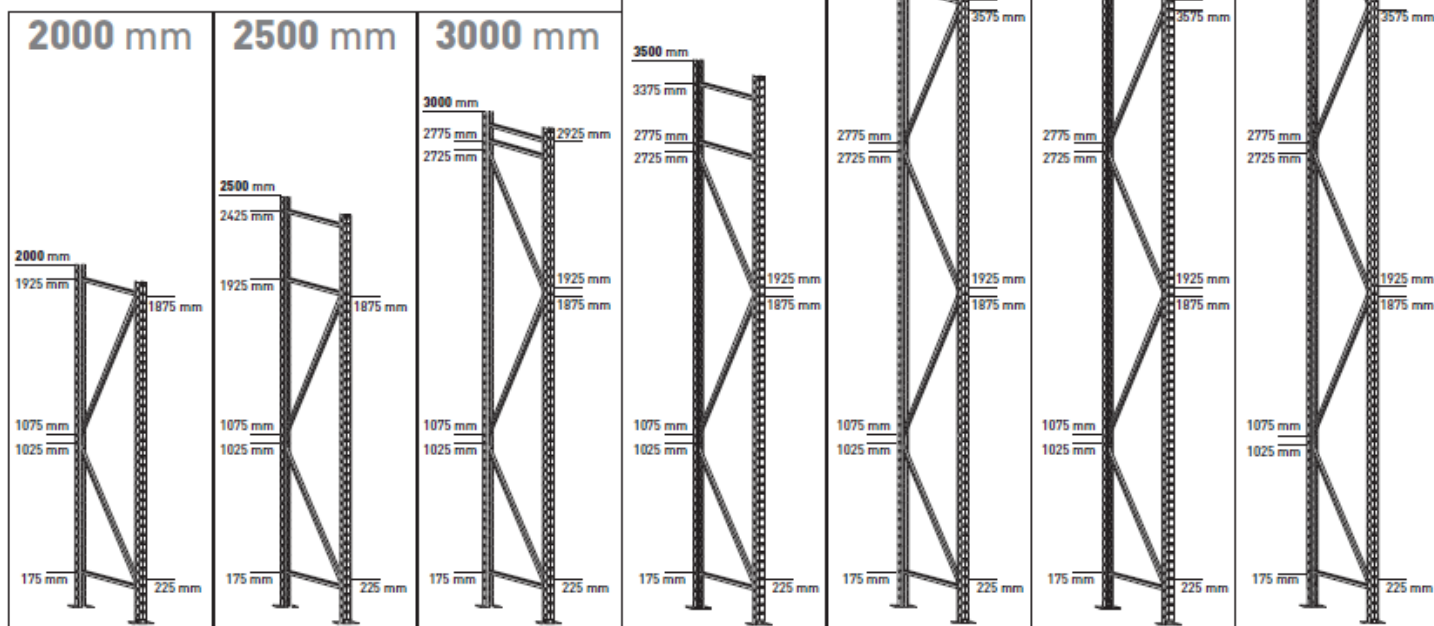







	2000	2500	3000	3500	4000	4500	5000
A [2000 mm]	2	2	2	2	2	2	2
B	2	2	2	2	2	2	2
C L. 16 mm	4	4	4	4	4	4	4
D	2	3	3	3	3	2	3
E L. 35 mm	8	10	12	12	14	14	16
F	2	2	3	3	4	5	5

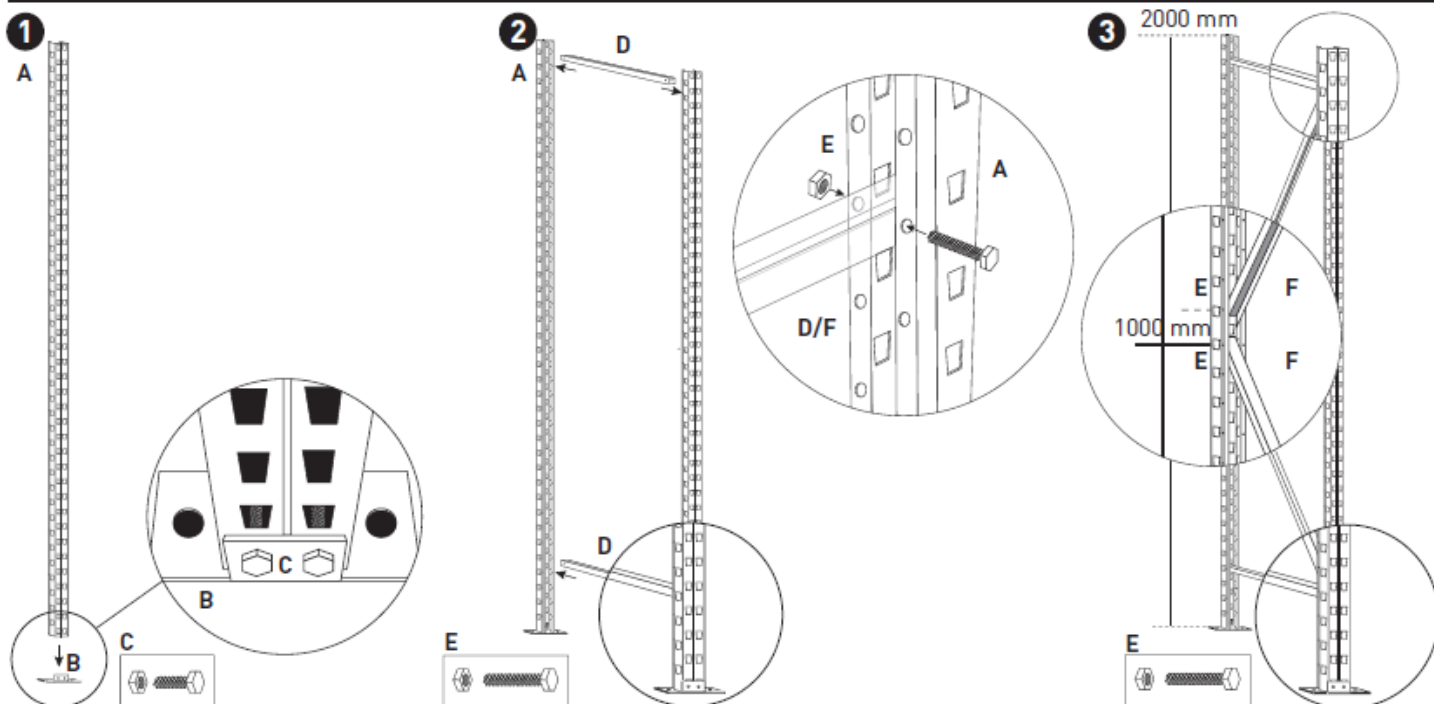




Élément de Départ

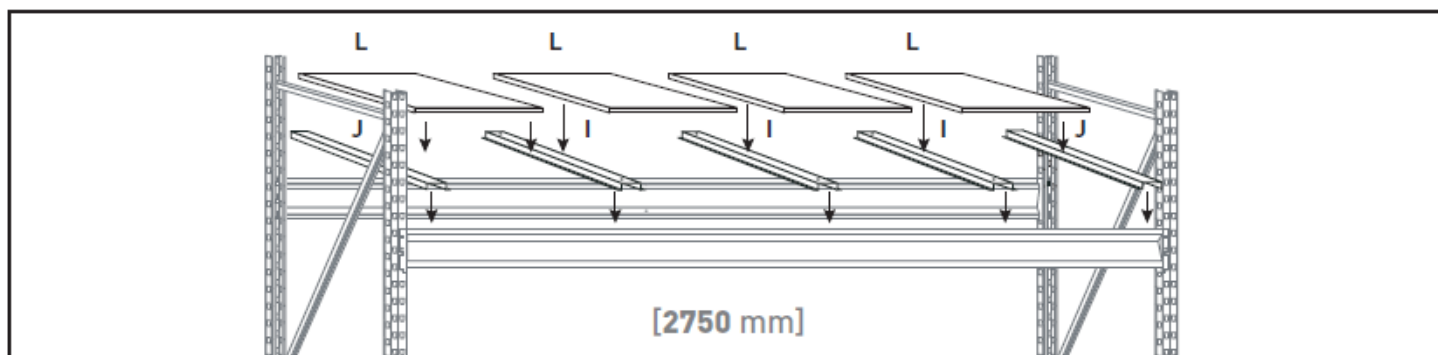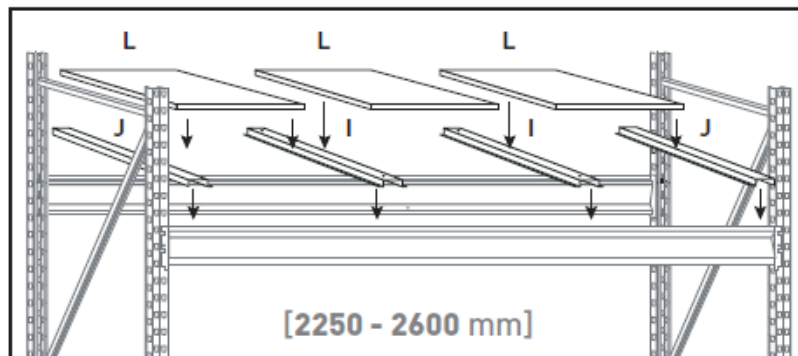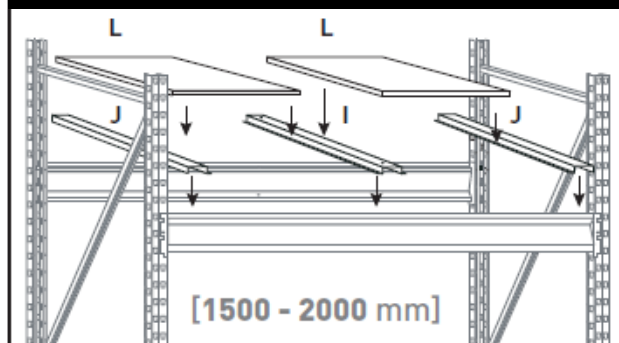

	1500 - 2000 mm	2250 - 2600 mm	2750 mm
G	2	2	2
H	4	4	4
I	1	2	3
J	2	2	2
K L. 30 mm	2	4	6
L	2	3	4

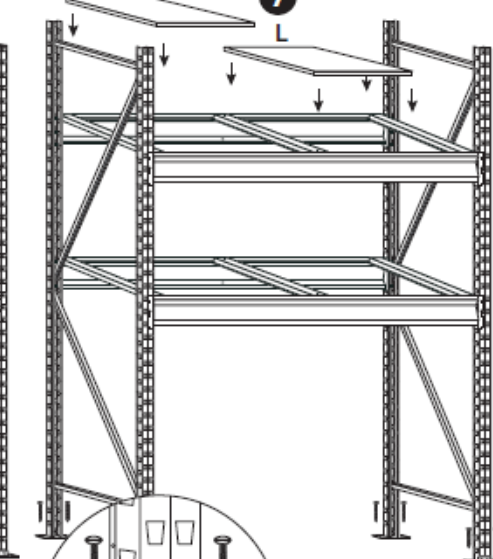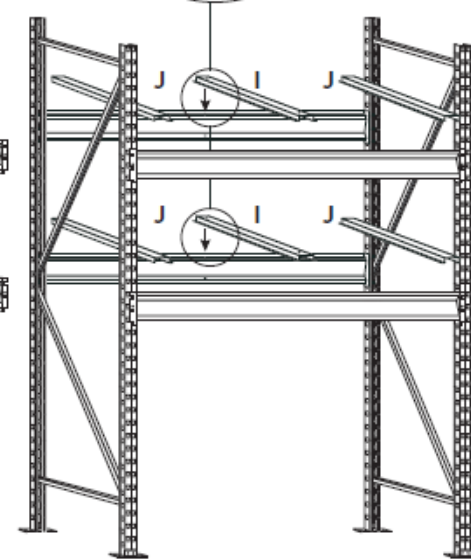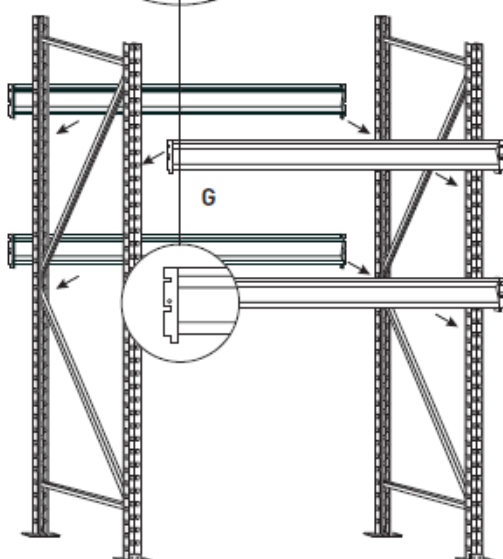

Élément Suivant

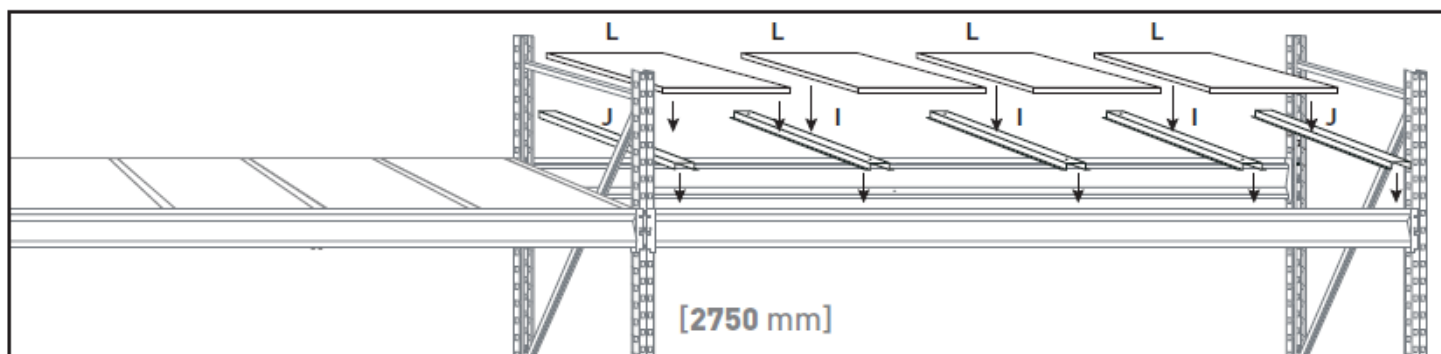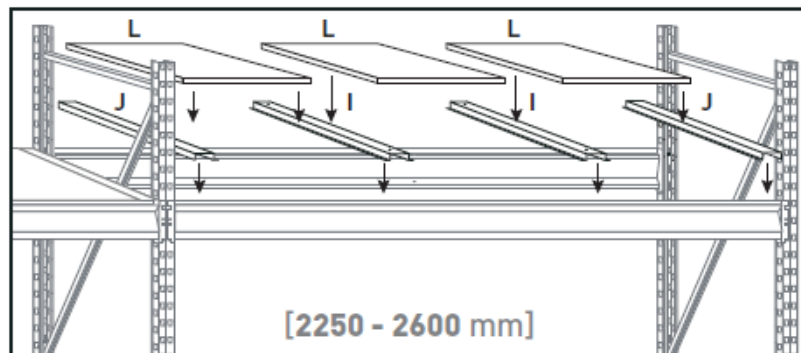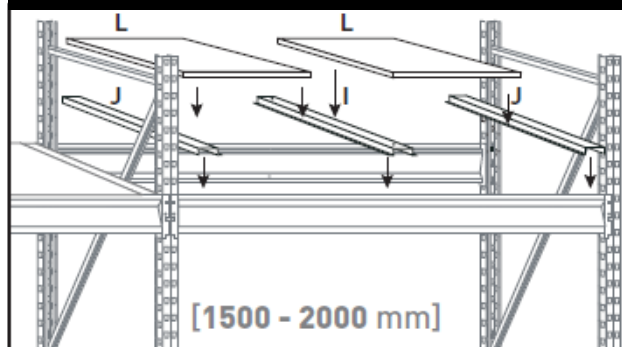

	1500 - 2000 mm	2250 - 2600 mm	2750 mm
G 	2	2	2
H 	4	4	4
I 	1	2	3
J 	2	2	2
K  L. 30 mm	2	4	6
L 	2	3	4

